


Sprinter TII Geometry

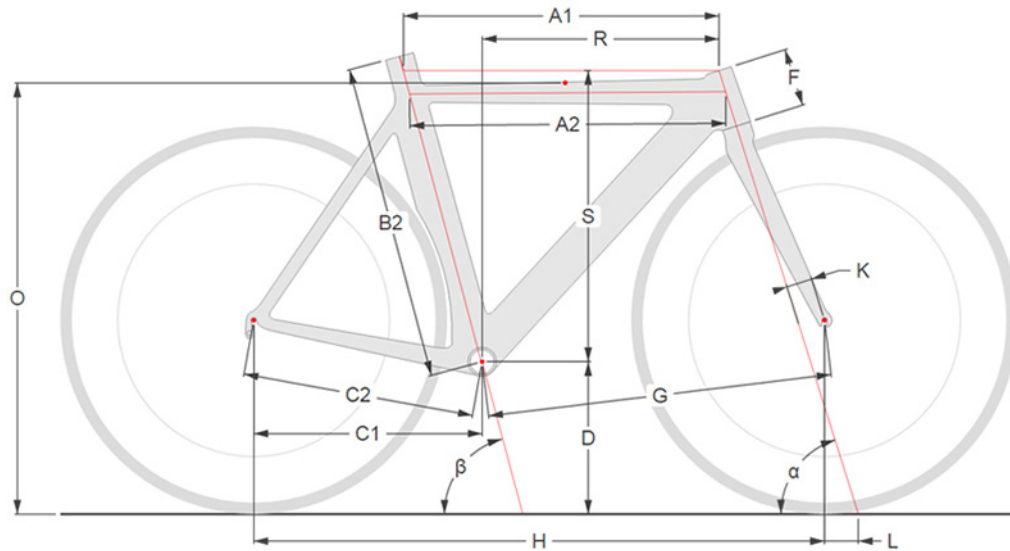

Men

Frame size VR		Typical Rider Height	Effective Top Tube Length	Actual Top Tube Length	Seat Tube Length to Top	Effective Chainstay Length	Actual Chainstay Length	Bottom Bracket Height	Head Tube Length	Front Center Distance	Wheelbase	Fork Rake	Trail	StandOver Midpoint	Reach	Stack	Head Tube Angle	Seat Tube Angle
cm	inch	VP (cm)	A1 (mm)	A2 (mm)	B2 (mm)	C1 (mm)	C2 (mm)	D (mm)	F (mm)	G (mm)	H (mm)	K (mm)	L (mm)	O (mm)	R (mm)	S (mm)	α (deg)	β (deg)
52	20,5	166-167	529	517	470	386	390	282	95	575	959	43	58,1	719	396	486	73,0	74,7
53	20,9	168-170	534	523	480	386	390	282	95	580	964	43	58,1	724	401	486	73,0	74,7
54	21,3	171-172	539	530	490	386	390	282	95	585	969	43	58,1	729	406	486	73,0	74,7
55	21,7	173-175	544	536	500	386	390	282	95	586	970	43	55,0	734	411	487	73,5	74,7
56	22,0	176-177	549	543	510	386	390	282	95	589	973	43	55,0	739	414	487	73,5	74,5
57	22,4	178-180	555	549	520	386	390	282	105	595	979	43	55,0	748	417	497	73,5	74,5
58	22,8	181-182	560	555	530	386	390	282	115	605	989	43	55,0	759	424	506	73,5	75,0
59	23,2	183-185	566	561	540	386	390	282	125	612	995	43	55,0	768	428	516	73,5	75,0
60	23,6	186-187	571	566	550	386	390	282	135	617	1000	43	55,0	778	430	526	73,5	75,0
61	24,0	188-190	577	573	560	386	390	282	145	628	1012	43	55,0	788	439	535	73,5	75,5
62	24,4	191-195	583	579	570	386	390	282	155	634	1018	43	55,0	798	442	545	73,5	75,5