


Magnetic T9 Geometry

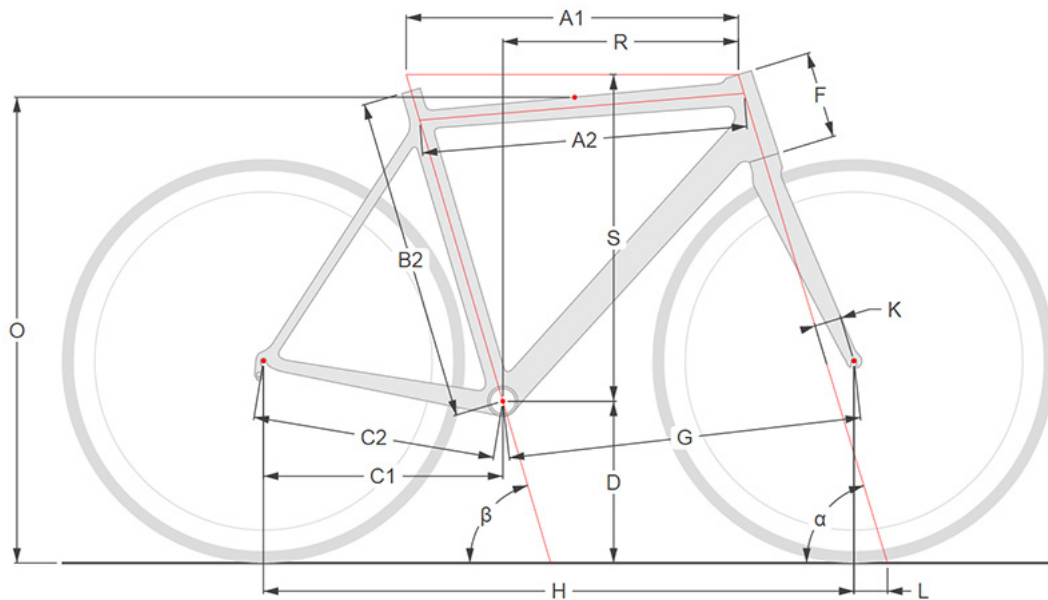

Men

Frame size VR		Typical Rider Height	Effective Top Tube Length	Actual Top Tube Length	Seat Tube Length to Top	Effective Chainstay Length	Actual Chainstay Length	Bottom Bracket Height	Head Tube Length	Front Center Distance	Wheelbase	Fork Rake	Trail	StandOver Midpoint	Reach	Stack	Head Tube Angle	Seat Tube Angle
cm	inch	VP (cm)	A1 (mm)	A2 (mm)	B2 (mm)	C1 (mm)	C2 (mm)	D (mm)	F (mm)	G (mm)	H (mm)	K (mm)	L (mm)	O (mm)	R (mm)	S (mm)	α (deg)	β (deg)
48	18,9	158-160	518	513	480	386	390	282	95	576	959	43	61,2	734	393	484	72,5	75,5
49	19,3	161-162	524	520	490	386	390	282	95	582	965	43	61,2	739	399	484	72,5	75,5
50	19,7	163-165	530	527	500	386	390	282	105	588	972	43	61,2	748	402	494	72,5	75,5
51	20,1	166-167	536	534	510	386	390	282	105	592	975	43	61,2	753	406	494	72,5	75,2
52	20,5	168-170	542	542	520	386	390	282	105	593	977	43	58,1	759	411	495	73,0	75,2
53	20,9	171-172	548	547	530	386	390	282	115	595	978	43	58,1	768	410	505	73,0	74,7
54	21,3	173-175	554	553	540	386	390	282	125	601	985	43	58,1	777	413	514	73,0	74,7
55	21,7	176-177	560	558	550	386	390	282	135	601	984	43	55,0	787	414	526	73,5	74,5
56	22,0	178-180	566	564	560	386	390	282	145	607	991	43	55,0	797	418	535	73,5	74,5
57	22,4	181-182	571	569	570	386	390	282	155	607	991	43	55,0	806	415	545	73,5	74,0
58	22,8	183-185	576	573	580	386	390	282	165	607	991	43	51,9	816	417	556	74,0	74,0
59	23,2	186-187	582	579	590	386	390	282	175	613	997	43	51,9	826	420	566	74,0	74,0
60	23,6	188-190	588	585	600	386	390	282	185	619	1003	43	51,9	836	423	575	74,0	74,0
61	24,0	191-192	594	591	610	386	390	282	195	625	1009	43	51,9	845	426	585	74,0	74,0
62	24,4	193-195	600	597	620	386	390	282	205	631	1015	43	51,9	855	430	594	74,0	74,0
63	24,8	196-198	606	603	630	386	390	282	215	637	1021	43	51,9	864	433	604	74,0	74,0
64	25,2	199-205	612	609	640	386	390	282	225	643	1027	43	51,9	874	436	614	74,0	74,0