


Sprinter RX Geometry

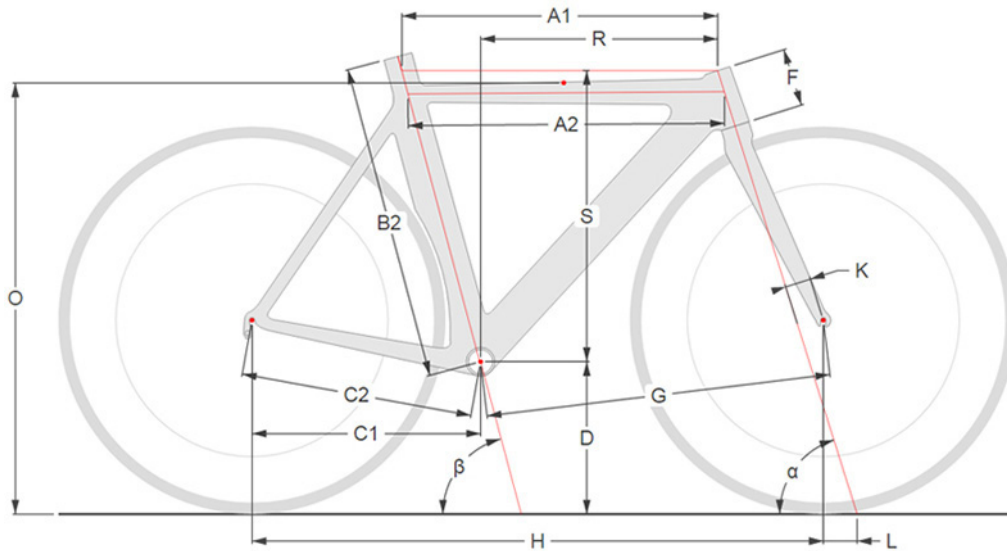

Men

Frame size VR		Typical Rider Height	Effective Top Tube Length	Actual Top Tube Length	Seat Tube Length to Top	Effective Chainstay Length	Actual Chainstay Length	Bottom Bracket Height	Head Tube Length	Front Center Distance	Wheelbase	Fork Rake	Trail	StandOver Midpoint	Reach	Stack	Head Tube Angle	Seat Tube Angle
cm	inch	VP (cm)	A1 (mm)	A2 (mm)	B2 (mm)	C1 (mm)	C2 (mm)	D (mm)	F (mm)	G (mm)	H (mm)	K (mm)	L (mm)	O (mm)	R (mm)	S (mm)	α (deg)	β (deg)
54	21,3	171-172	539	528	490	392	398	268	95	587	975	43	64,3	720	398	497	72,0	74,2
55	21,7	173-175	544	535	500	392	398	268	95	594	982	43	64,3	725	406	497	72,0	74,5
56	22,0	176-177	549	542	510	392	398	268	95	597	985	43	61,2	731	413	498	72,5	74,7
57	22,4	178-180	555	548	520	395	401	268	105	606	997	43	61,2	740	419	508	72,5	75,0
58	22,8	181-182	560	552	530	395	401	268	115	607	998	43	58,1	751	421	519	73,0	75,0
59	23,2	183-185	566	559	540	395	401	268	125	616	1007	43	58,1	761	426	528	73,0	75,2
60	23,6	186-187	571	564	550	395	401	268	135	624	1015	43	58,1	771	432	538	73,0	75,5
61	24,0	188-190	577	571	560	395	401	268	145	632	1024	43	58,1	780	437	547	73,0	75,7
62	24,4	191-195	583	577	570	395	401	268	155	642	1033	43	58,1	790	444	557	73,0	76,0